

MAKE DREAMS POSSIBLE
让梦想成为可能



江西中品工具有限公司
JIANGXI ZHONGPIN TOOLS CO.,LTD

<http://www.zonpn.com>



JIANGXI ZHONGPIN TOOLS CO.,LTD.



ZHONGPIN TOOLS

江西中品工具有限公司

ZHONGPIN 企业简介

INTRODUCTION

江西中品工具有限公司是一家专业从事五金工具产品研发、生产、销售于一体的现代化民营企业。

公司主要产品有各种系列冲击钻、麻花钻、锯片、开孔器、凿子等，其中冲击钻的生产规模已于同行业中名列前茅。公司拥有规模化、专业化的生产体系，先进的生产设备，雄厚的技术力量及完善的质量保证体系，在同行业中形成独特的竞争优势，产品畅销欧洲、中东、北美、东南亚等多个国家和地区。

公司通过ISO9001质量管理体系认证，始终以“质量第一，信誉至上”为经营宗旨，以“诚信可靠、与时俱进、和谐发展”为经营理念，以“力创国际品牌”为企业目标，再接再厉，不断进取，以更优质的产品质量和更完善的服务，携手国内外各界朋友，“让梦想成为可能”！

Founded in 1998, ZHONGPIN Tools mainly produce hardware tools. "Build national industry" and "Undertake social responsibility" are two missions of the company when founded. After 10 years' hardworking, ZHONGPIN Tools people have already turned a family enterprise into a medium-sized corporation, which possesses more than 200 workers, about 40 of them are skilled. ZHONGPIN Tools spend heavily bringing in experienced workers and advanced equipment, thus, the degree of automation has reached international level, the quality of the products is professional and best. ZHONGPIN Tools people work hard to create its own culture, improve management. Everyone becomes host of the company and take company's development as his own business..

Now, ZHONGPIN Tools is stepping forward to embrace greater prosperity.

让梦想成为可能

Make Dreams Possible



目录 Catalogue

3 电锤钻头

ELECTRICAL HAMMER DRILL BIT

- 4 四坑电锤钻头
SDS PLUS DRILL BIT
- 5 开槽钻
SDS PLUS SLOTTED DRILL BIT
- 5 长六角钻头
HEX SHANK DRILL BIT
- 6 五坑电锤钻头
SDS MAX DRILL BIT
- 7 多功能冲击水泥钻
MASONRY DRILL Multi-Purpose
- 8 冲击水泥钻
MASONRY DRILL STANDARD

9 凿子 CHISEL

- 12 四坑凿子
SDS PLUS CHISEL
- 13 五坑凿子
SDS MAX CHISEL
- 14 六角凿子
ALL KINDS OF HEX CHISEL
- 15 长六角凿子
HEX CHISEL

17 连接杆 ADAPTOR

19 墙壁开孔器 HOLLOW ELECTRICAL HAMMER BIT



ZHONGPIN TOOLS

钻头系列

ELECTRICAL HAMMER DRILL BIT SERIES

SDS PLUS DRILL BIT 四坑电锤钻头

材料：钻体是 40Cr，合金刀头是 YG8C、YG6X

硬度：钻体是 45-48 华式硬度，合金刀头是 88.5 华式硬度

用途：用于不含钢筋的墙壁以及混凝土的打孔

Material: 40Cr for Body, YG8C or YG6X for Carbide tip

Hardness: 45-48 HRC for body, 88.5 HRC for Carbide tip

Function: used for drilling Wall and Concrete without Steel





四坑电锤钻头

SDS PLUS DRILL BIT

材料：钻体是 40Cr，合金刀头是 YG8C、YG6X
 硬度：钻体是 45-48 华式硬度，合金刀头是 88.5 华式硬度
 用途：用于不含钢筋的墙壁以及混凝土的打孔

Material: 40Cr for Body, YG8C or YG6X for Carbide tip
 Hardness: 45-48 HRC for body, 88.5 HRC for Carbide tip
 Function: used for drilling Wall and Concrete without Steel





Brick



Concrete



Stone



规格 / Size	总长度 / Total Length	工作长度 / Working Length
Ø 3~20 mm	110 mm	50 mm
Ø 3~20 mm	160 mm	100 mm
Ø 4~40 mm	210 mm	150 mm
Ø 6~40 mm	260 mm	200 mm
Ø 6~40 mm	310 mm	250 mm
Ø 8~40 mm	360 mm	300 mm
Ø 8~40 mm	410 mm	350 mm
Ø 8~40 mm	460 mm	400 mm
Ø 8~40 mm	600 mm	540 mm
Ø 8~40 mm	800 mm	740 mm
Ø 8~40 mm	1000 mm	940 mm



Features

- The hammering reducer generates micro percussion and keeps the walls of the block safe from damage.
- Calibrated hole.
- Increased anchoring strength.
- The unshaped part of the flute provides rigidity and guides the bit along the line over the entire drilling depth.
- The flute shape makes removal easier while drilling through insulating material.

Benefits

- Semi positive carbide tip.
- Tip angle 130°.
- Short shaped length.
- Elongated pitch.
- Hammering reducer.
- Compatible SDS-plus shank.





开槽钻

SLOTTED DRILL





产品描述 / Description	规格 / Size
Drills for Slotting	10x160mm
	12x160mm
	14x160mm



长六角钻头

HEX SHANK DRILL BIT

产品描述 / Description	规格 / Size	总长度 / Total Length	工作长度 / Working Length
长六角钻头 Hex Shank Drill Bit	Ø 8~22 mm	220 mm	80 mm
	Ø 10~32 mm	280 mm	140 mm
	Ø 12~38 mm	400 mm	260 mm
	Ø 14~38 mm	500 mm	360 mm
	Ø 16~38 mm	600 mm	460 mm





五坑电锤钻头

SDS MAX DRILL BIT

材料: 钻体是 40Cr, 合金刀头是 YG8C
硬度: 钻体是 45-48 华式硬度, 合金刀头是 88.5 华式硬度
用途: 用于不含钢筋的墙壁以及混凝土的打孔

Material: 40Cr for Body, YG8C for Carbide tip
 Hardness: 45-48 HRC for body, 88.5 HRC for Carbide tip
 Function: used for drilling Wall and Concrete without Steel

规格 / Size	总长度 / Total Length	工作长度 / Working Length
Ø 10-45 mm	260mm	120mm
Ø 10-45 mm	340mm	200mm
Ø 10-45 mm	540mm	400mm
Ø 10-45 mm	600mm	460mm
Ø 10-45 mm	800mm	660mm
Ø 10-45 mm	1000mm	860mm
Ø 10-45 mm	1200mm	1060mm





Brick



Concrete



Stone





冲击水泥钻

多功能 / Multi-purpose

MASONRY DRILL BIT

材料: 钻体是 40Cr, 合金刀头是 YG6X
硬度: 钻体是 45-48 华氏硬度, 合金刀头是 88.5 华氏硬度
用途: 用于不含钢筋的墙壁以及混凝土的打孔

Material: 40Cr for Body, YG6X for Carbide tip
 Hardness: 45-48 HRC for body, 88.5 HRC for Carbide tip
 Function: Multi-purpose for drilling all kinds of materials



Low density wood



Alloy steel



Ceramic Tile



Slate



Plastic



Brick



Ø Max 12.7

Features

- Positive sharpening with centering point.
- Angle 118°.
- 4 sharpened edges.
- L shaped fl ute.
- Straight shank

Benefits

- Universal use.
- Perfect clean hole.
- Fast penetration.





冲击水泥钻

普通 / Standard

MASONRY DRILL BIT



Brick



Concrete



Stone

材料： 钻体是 40Cr，合金刀头是 YG8C
硬度： 钻体是 45-48 华氏硬度，合金刀头是 88.5 华氏硬度
用途： 用于不含钢筋的墙壁以及混凝土的打孔

Material: 40Cr for Body, YG8C for Carbide tip
 Hardness: 45-48 HRC for body, 88.5 HRC for Carbide tip
 Function: used for drilling Wall and Concrete without Steel



ØMax 12.7

规格 / Size	总长度 / Total Length	工作长度 / Working Length
Ø 3mm	70 mm	30 mm
Ø 4mm	80 mm	40 mm
Ø 5mm	90 mm	50 mm
Ø 6mm	100 mm	60 mm
Ø 7mm	100 mm	60 mm
Ø 8mm	120 mm	80 mm
Ø 9mm	120 mm	80 mm
Ø 10mm	120 mm	80 mm
Ø 5~20mm	150 mm	110 mm
Ø 6~16mm	200 mm	160 mm
Ø 6~20mm	300 mm	260 mm
Ø 6~25mm	400 mm	360 mm
Ø 6~22mm	600 mm	560 mm
Ø 6~25mm	1000 mm	960 mm



Features

- Sandblasted finish.
- Straight shank.

Benefits

- Carbide grade for longer life.
- Higher tip for better guiding.





ZHONGPIN TOOLS

凿子系列
CHISEL

CHISEL

凿子

材料：40Cr,42CrMo

硬度：40Cr 材料的硬度是 45-48 华式，42CrMo 材料的硬度是 50-52 华式

用途：用于凿击墙壁以及混凝土

Material: 40Cr,42CrMo

Hardness: 45-48 HRC for 42Cr,50-52HRC for 42CrMo

Function: used for cutting Concrete and Wall





四坑凿子

SDS PLUS CHISEL

材料: 40Cr, 42CrMo

硬度: 40Cr 材料的硬度是 45-48 华式, 42CrMo 材料的硬度是 50-52 华式


用途: 用于凿击墙壁以及混凝土

Material: 40Cr, 42CrMo

Hardness: 45-48 HRC for 40Cr, 50-52HRC for 42CrMo

Function: used for cutting Concrete and Wall

规格 / Size
14x250 mm
14x20x250 mm
14x22x250 mm
14x40x250 mm
14x50x250 mm
17x280 mm
17x25x280 mm
17x22x280 mm
17x40x280 mm
17x50x280 mm





五坑凿子

SDS MAX CHISEL

产品描述 / Description	规格 / Size
五坑凿子尖凿 SDS MAX Chisel Point	14x400
	14x600
	18x280
	18x300
	18x350
	18x400
	18x600

产品描述 / Description	规格 / Size
五坑凿子扁凿 SDS MAX Chisel Flat	18x25x280
	18x25x300
	18x25x350
	18x25x400
	18x40x280
	18x40x300
	18x40x400
	18x50x280
	18x50x350
	18x50x400
	18x25x600
	18x35x600
	18x50x600






六角凿子

ALL KINDS OF HEX CHISEL

Hexagonal 19 mm + retaining groove

1




规格 / Size

Ø	Length
19	400

Hexagonal 22 mm + 6 grooves (TE-S)

2




规格 / Size

Ø	Length
19	300
19	400

Hexagonal 19 mm + cylindrical tip Ø 16.5x35 mm

3




规格 / Size

Ø	Length
22	360

Hexagonal 28 mm + flat

4




规格 / Size

Ø	Length
28	400

Hexagonal 30 mm + cylindrical tip Ø 24x55 mm

5



规格 / Size

Ø	Length
24	400





长六角凿子

HEX CHISEL

产品描述 / Description	规格 / Size
长六角尖凿 HEX CHISEL POINT	17x280 mm
	17x350 mm
	17x410 mm
	17x450 mm
	17x520 mm
	17x600 mm
	17x1000 mm

产品描述 / Description	规格 / Size
长六角扁凿 HEX CHISEL FLAT	17x25x280 mm
	17x50x280 mm
	17x80x280 mm
	17x25x350 mm
	17x50x350 mm
	17x80x350 mm
	17x25x450 mm
	17x50x450 mm
	17x80x450 mm



产品描述 / Description	规格 / Size
SDS PLUS Straight Chisel	10x160 mm
	10x10x160 mm



产品描述 / Description	规格 / SIZE
SDS PLUS Chisel	14x25x160 mm
	14x38x160 mm



ZHONGPIN TOOLS

空心电锤钻系列

HOLLOW ELECTRICAL HAMMER DRILL BIT (WALL HOLE SAW) SERIES

HOLLOW ELECTRICAL HAMMER DRILL BIT (WALL HOLE SAW) 墙壁开孔器

材料：钻体是 45 号钢材，合金刀头是 YG8C
用途：用于不含钢筋的墙壁以及混凝土的打孔

Material: 45# Steel for Body, YG8C for Carbide tip
Function: used for drilling Wall and Concrete without Steel






墙壁开孔器

HOLLOW ELECTRICAL HAMMER DRILL BIT (WALL HOLE SAW)

材料：钻体是 45 号钢材，合金刀头是 YG8C
用途：用于不含钢筋的墙壁以及混凝土的打孔

Material: 45# Steel for Body, YG8C for Carbide tip
Function: used for drilling Wall and Concrete without Steel

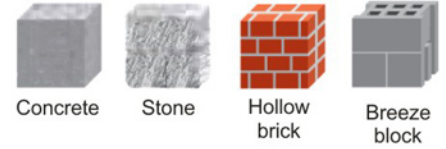

Features

- Carbide teeth welded at high temperature.
- Threaded steel.
- M16 shank.

Applications

- Drill big diameters for electrical installations.
- For hammer drill intermediate power for 700W to 950W.

规格 / Size	总长度 / Total Length	工作长度 / Working Length
∅ 30	70mm	50mm
∅ 35	70mm	50mm
∅ 40	70mm	50mm
∅ 45	70mm	50mm
∅ 50	70mm	50mm
∅ 55	70mm	50mm
∅ 60	70mm	50mm
∅ 65	70mm	50mm
∅ 68	70mm	50mm
∅ 70	70mm	50mm
∅ 75	70mm	50mm
∅ 80	70mm	50mm
∅ 82	70mm	50mm
∅ 85	70mm	50mm
∅ 90	70mm	50mm
∅ 95	70mm	50mm
∅ 100	70mm	50mm
∅ 110	70mm	50mm
∅ 120	70mm	50mm
∅ 130	70mm	50mm
∅ 150	70mm	50mm





ZHONGPIN TOOLS

连接杆系列
ADAPTOR

ADAPTOR 连接杆

材料：40Cr

硬度：45-48 华式硬度

用途：用于墙壁开孔器跟机器之间的连接

Material: 40Cr

Hardness: 45-48 HRC

Function: used for connecting the Hollow electrical hammer drill with machine





连接杆

ADAPTOR

材料: 40Cr
硬度: 45-48 华式硬度
用途: 用于墙壁开孔器跟机器之间的连接

Material: 40Cr
 Hardness: 45-48 HRC
 Function: used for connecting the Hollow electrical hammer drill with machine

产品描述 / Description	规格 / Size	
SDS PLUS/SDS MAX ADAPTOR	M22*100 mm	M16*100 mm
	M22*110 mm	M16*110 mm
	M22*130 mm	M16*130 mm
	M22*160 mm	M16*160 mm
	M22*200 mm	M16*200 mm
	M22*260 mm	M16*260 mm
	M22*300 mm	M16*300 mm
	M22*350 mm	M16*350 mm
	M22*400 mm	M16*400 mm
	M22*500 mm	M16*500 mm
	M22*600 mm	M16*600 mm
	M22*800 mm	M16*800 mm
	M22*1000 mm	M16*1000 mm



产品描述 / Description	规格 / Size
SDS PLUS TO SDS MAX	260 mm



产品描述 / Description	规格 / Size
Small adaptor	1/2"x20 m
(Black & Sandblast surface)	1.25x20 mm




高速钢钻头(M35&M2)

HSS DRILL COBALT

规格 / Size	总长度 / Total Length	工作长度 / Working Length
Ø 2	49 mm	24 mm
Ø 2.5	57 mm	30 mm
Ø 3	61 mm	33 mm
Ø 3.2	65 mm	36 mm
Ø 3.5	70 mm	39 mm
Ø 4	75 mm	43 mm
Ø 4.2	75 mm	43 mm
Ø 4.5	80 mm	47 mm
Ø 5	86 mm	52 mm
Ø 5.2	86 mm	52 mm
Ø 5.5	93 mm	57 mm
Ø 6	93 mm	57 mm
Ø 6.2	101 mm	63 mm
Ø 6.5	109 mm	69 mm
Ø 7	109 mm	69 mm
Ø 7.5	117 mm	75 mm
Ø 8	117 mm	75 mm
Ø 8.5	125 mm	81 mm
Ø 9	125 mm	81 mm
Ø 9.5	133 mm	87 mm
Ø 10	133 mm	87 mm
Ø 10.5	142 mm	94 mm
Ø 11	142 mm	94 mm
Ø 11.5	151 mm	101 mm
Ø 12	151 mm	101 mm
Ø 12.5	151 mm	101 mm
Ø 13	151 mm	101 mm

DIN 338



HSS-E
5 % Co



Ø Max 12.7

Features

- Fully ground drill bit 5% cobalt HSS-E.
- 135° tip angle.
- Split point.
- Flute type N.
- Diameter tolerance h8.

Benefits

- Starting precision.
- The cobalt content makes the bit harder and heightens temperature resistance, for work with hard metals such as stainless steel.

Applications

- Unalloyed and alloyed steels (up to 1200/mm²), stainless steel, cast iron.
- The basic choice for industrial applications and the drilling of materials difficult to machine.

T.C.T SAW BLADE 合金锯片



外径 D	齿宽 B	中孔 d	齿数 Z
Ø 110mm	1.6	20	30~40
Ø 125mm	1.8	22/23	30~40
Ø 150mm	1.8	25.4	40~60
Ø 180mm	1.8	20/25.4	40~60
Ø 200mm	2	25.4	40~100
Ø 230mm	2.4	25.4	40~100
Ø 250mm	2.4	25.4	40~120
Ø 300mm	3.2	25.4/30	40~120
Ø 350mm	3.4	30	40~120
Ø 400mm	3.8	30	40~120
Ø 450mm	3.8	30	40~120
Ø 500mm	4	30	40~120



江西中品工具有限公司

JIANGXI ZHONGPIN TOOLS CO.,LTD.

MAKE DREAMS POSSIBLE

让梦想成为可能

地址：江西省新余市高新区光明路温商五金产业园
ADD: STEEL INDUSTRIAL PARK,NANYUANG ROAD,
HIGH-TECH DEVELOPMENT ZONE,XINYU,JIANGXI,CHINA
TEL: 0086(0)790-6761788 (国内)
0086(0)790-6761688 (Foreign Market)

[HTTP://www.zonpn.com](http://www.zonpn.com)